


**Notes:**

A) The weight resistance of the glass and post components installed in the diagram as shown are recommended by FMF Glass Hardware.


B) The installed glass thickness must be 10-12mm and must be safely tempered.

C) Recommendation is for hardware components only. Mounting the post to the base structure is a site condition and the installers must ensure that the fasteners are strong enough to resist the design weight.

D) The base material to which the posts are being mounted must resist the design weight.

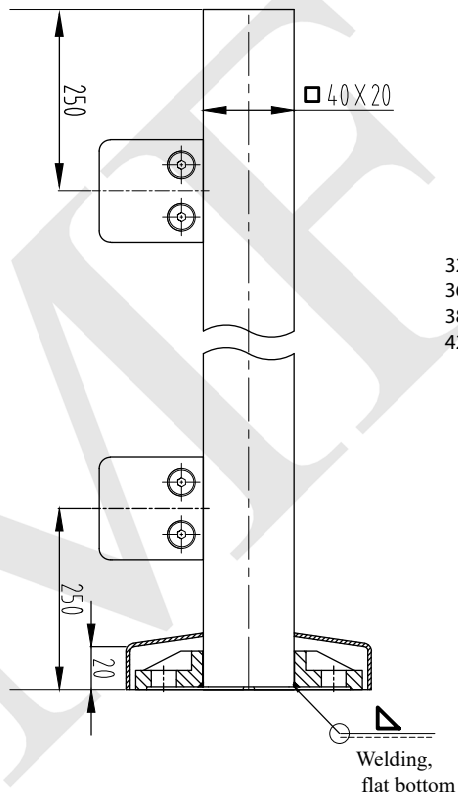

32" (812mm);  
36" (914mm);  
38" (965mm);  
42" (1067mm)

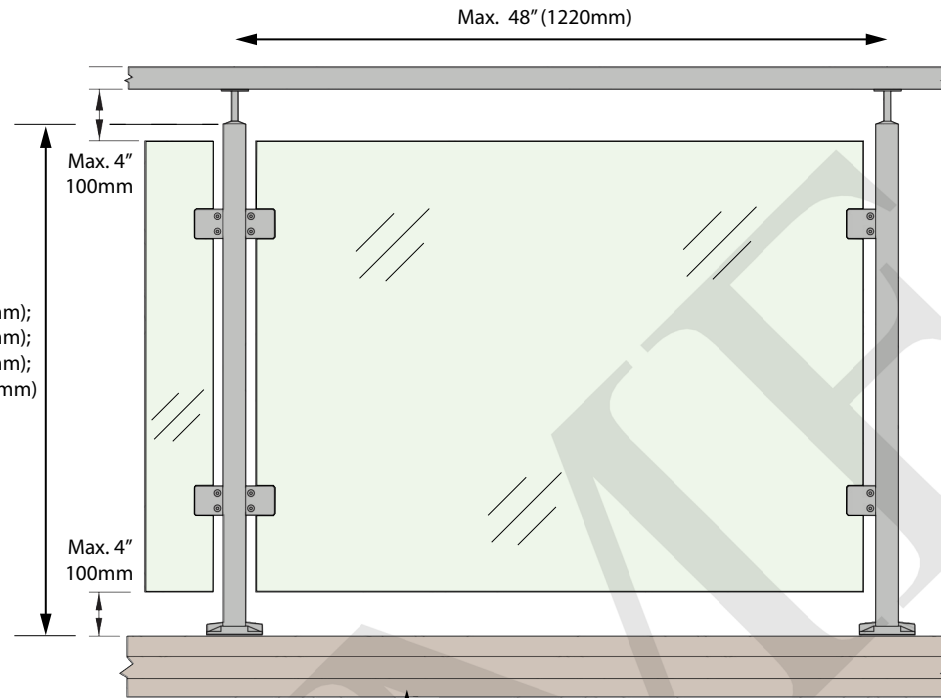


**Fasteners Recommended on Wood Surface:**  
Lag Bolt 3/8" x 3 1/2" thread embedded.

**On Concrete Surface:**  
Wedge anchor 3/8" x 3"

Maximal Glass weight for 2 Posts  
80kg

10mm glass: 25kg/ sq. m  
12mm glass: 30kg/ sq. m

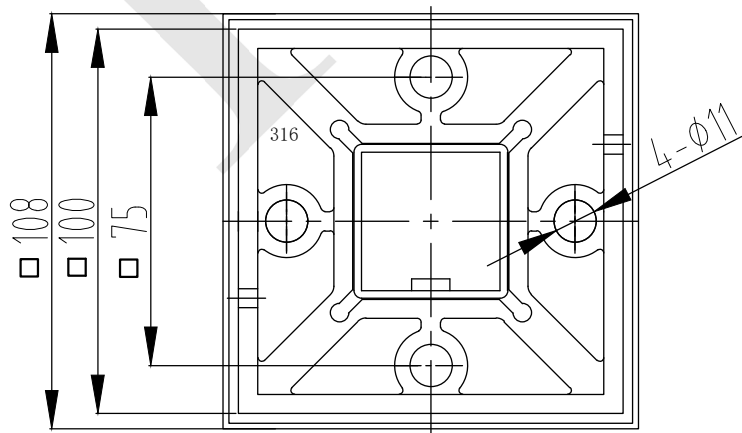

**Base plate thickness**  
8mm casted to Post

<b>NOTES:</b> - PROPRIETARY AND CONFIDENTIAL - THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FMF GLASS HARDWARE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FMF GLASS HARDWARE IS PROHIBITED.		<b>PRODUCT NAME:</b> Square Glass Railing Post		<b>PRODUCT MODEL NUMBER:</b> SPOST	
DWG NO. SPOST_1	UNIT: MM	DWG SIZE/SCALE A4/NTS	<b>FMF GLASS HARDWARE</b>		REV. 1
DATE: 04.22	DRAWN BY: FMF				SHEET 1 OF 1