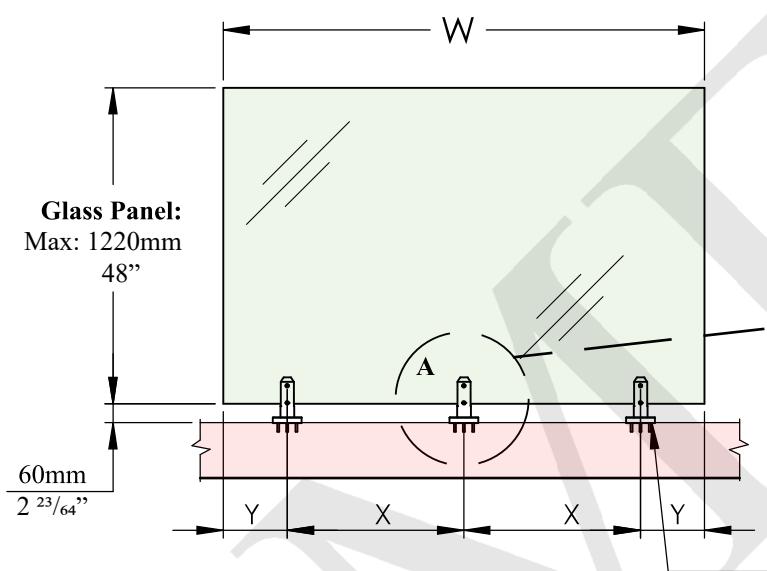


H  
G  
F  
E  
D  
C  
B  
A**On Wood Surface:**

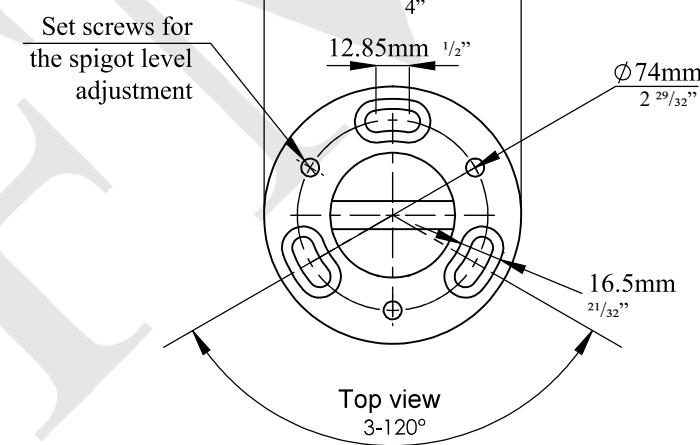
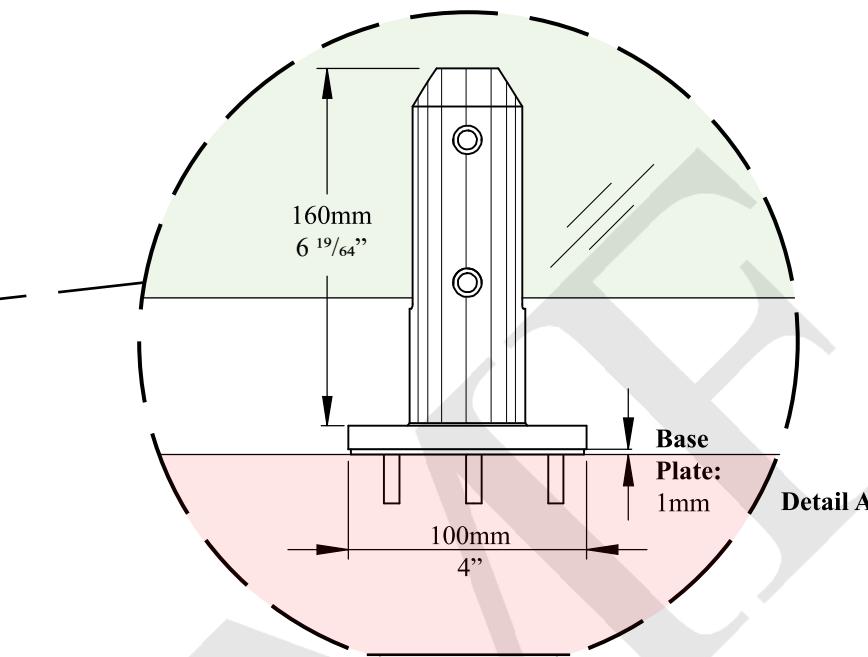
- Lag bolt 3/8"x 3 1/2"
- Optional: 3/8" thru-bolt or threaded rod with flat washers and nuts

**Fasteners Recommended on Concrete Surface:**

- Wedge anchor 3/8"x 3 1/2"

W (Inches)	X (Inches)	Y (Inches)	No. of Spigots
72	27	9	9
60	22	8	8
48	32	8	8
36	22	7	7
26	14	6	6

Glass Panel Height: 48" Maximum  
 W (Glass Width): 26" Minimum  
 X= 36" Maximum  
 Y= 6" Minimum - 9" Maximum

**General Notes:**

- The installed glass thickness must be 1/2" or 12mm and must be safety tempered.
- Recommendation is for hardware components only. Mounting the post to the base structure is a site condition and the installers must ensure that the fasteners are strong enough to resist the design weight.
- The base material to which the posts are being mounted must resist the design weight.

**NOTES:**

- PROPRIETARY AND CONFIDENTIAL  
 - THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FMF GLASS HARDWARE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FMF GLASS HARDWARE IS PROHIBITED.

PRODUCT NAME:  
Round Spigot

PRODUCT MODEL NUMBER:  
SPI-6SR

DWG NO.  
SPI-6SR\_1

UNIT:  
MM

DWG SIZESCALE  
A4/NTS

REV.  
1

FMF GLASS  
HARDWARE

SHEET 1 OF 1