

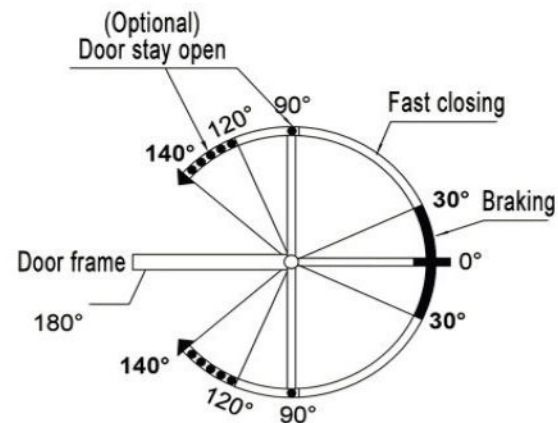
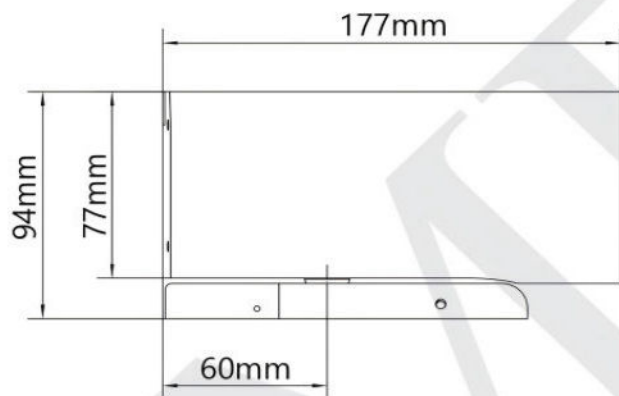
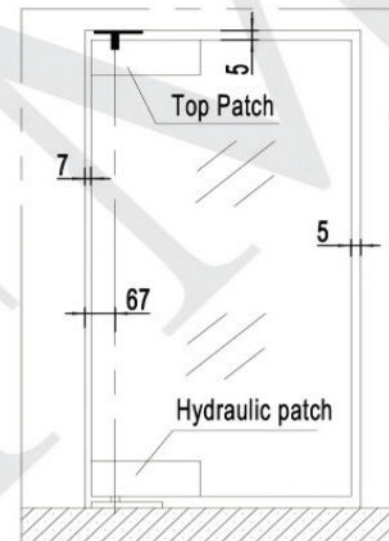


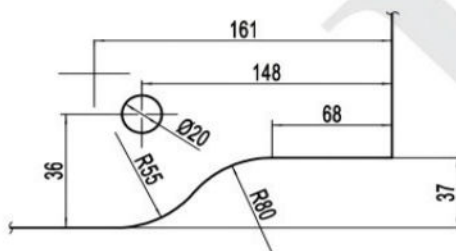

-Features:

Hold open at 90° and 140°~ 120°(optional)

- Keep the gaps as per drawing, make sure the top and bottom pivot center are well aligned.

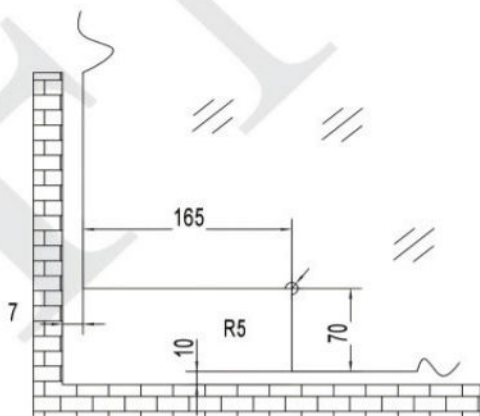

Model	Max. door width (mm)	Max. door weight (kg)	Glass Thickness	Application of rubber gasket
				Thickness (1.5mm)
HYP-151	≤965.2	100	10-12	4
			14-15	2

NOTES:

- PROPRIETARY AND CONFIDENTIAL
- THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FMF GLASS HARDWARE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FMF GLASS HARDWARE IS PROHIBITED.

PRODUCT NAME:

Hydraulic Hinge- 150kg

DWG NO.

HYP-151

DATE:

01.22

UNIT:

MM

DRAWN BY:

FMF

PRODUCT MODEL NUMBER:

HYP-151

DWG SIZE/SCALE

A4/NTS

**FMF GLASS
HARDWARE**


REV.

1




SHEET 1 OF 1




ELEVATION

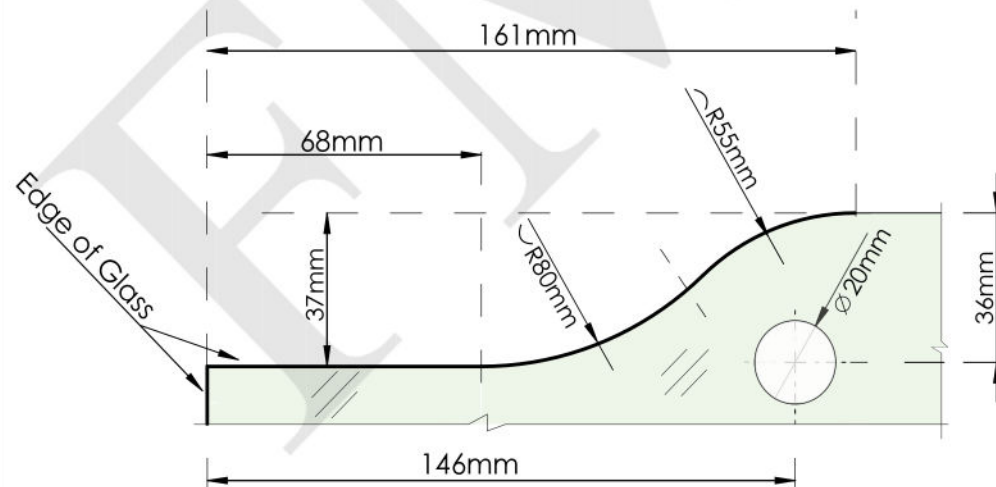

GLASS FABRICATION

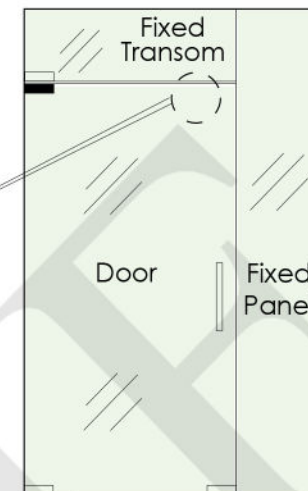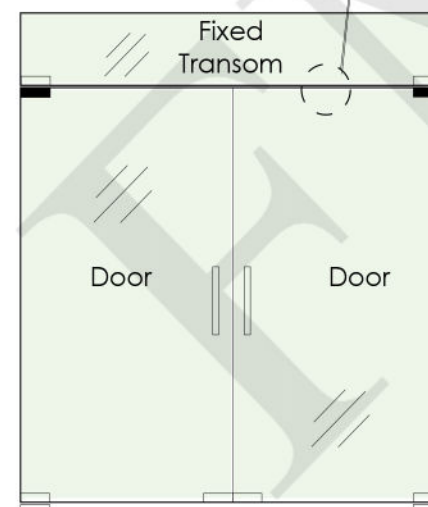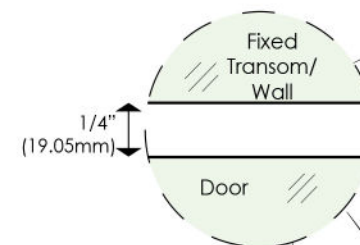

PAT-02

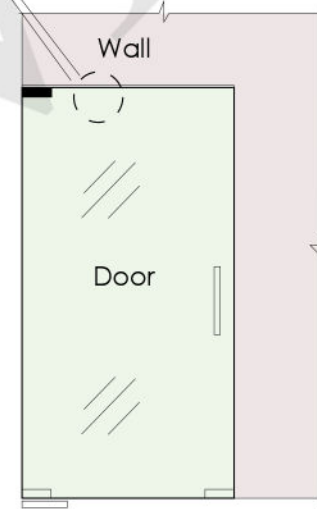

NOTES:

- PROPRIETARY AND CONFIDENTIAL
- THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FMF GLASS HARDWARE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FMF GLASS HARDWARE IS PROHIBITED.

PRODUCT NAME:

Patch fitting ceiling pivot

PRODUCT MODEL NUMBER:

PAT-02

DWG NO.

PAT-02_1

UNIT:

MM

DATE:

01.22

DRAWN BY:

FMF

DWG SIZE/SCALE

A4/NTS

**FMF GLASS
HARDWARE**

REV.

1

SHEET 1 OF 1