

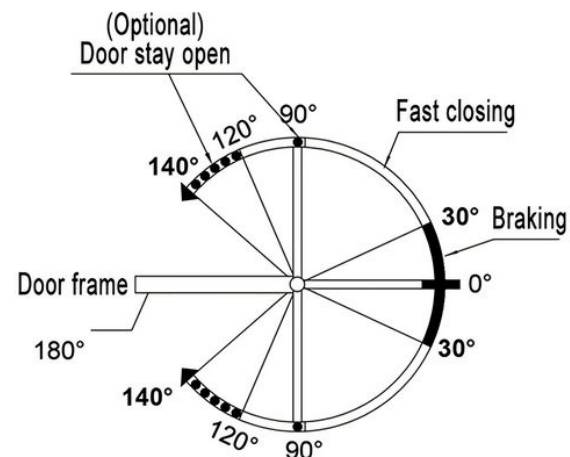
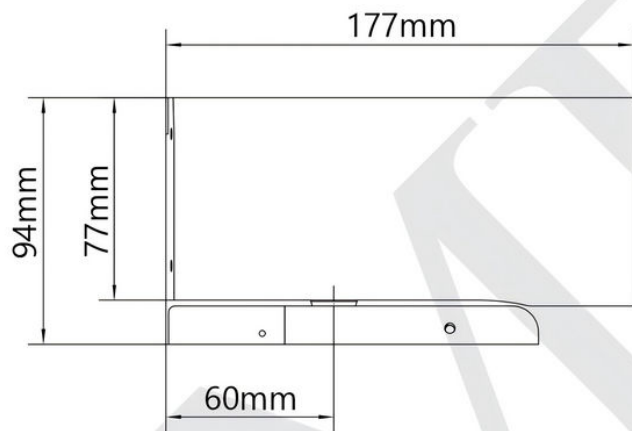
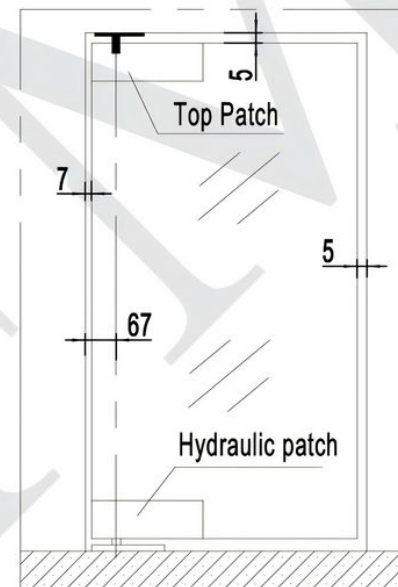


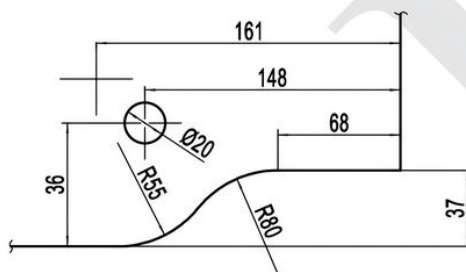

-Features:

Hold open at 90° and 140°~120°(optional)

● Keep the gaps as per drawing, make sure the top and bottom pivot center are well aligned.

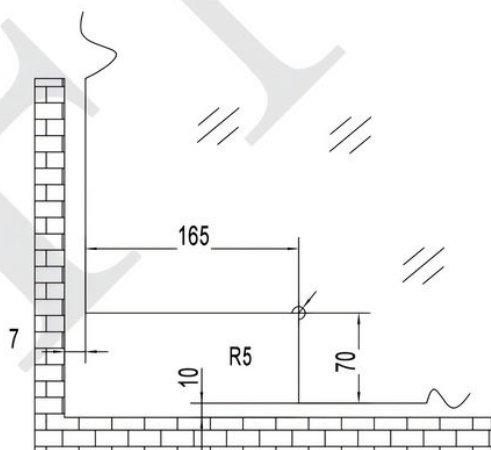

NOTES:

- PROPRIETARY AND CONFIDENTIAL
- THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FMF GLASS HARDWARE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FMF GLASS HARDWARE IS PROHIBITED.

PRODUCT NAME:

Hydraulic Hinge- 150kg

DWG NO.
HYP-101

DATE:

01.22

UNIT:

MM

DRAWN BY:

FMF

PRODUCT MODEL NUMBER:

HYP-101

DWG SIZE/SCALE

A4/NTS


**FMF GLASS
HARDWARE**

REV.

1

SHEET 1 OF 1

Model	Max. door width (mm)	Max. door weight (kg)	Glass Thickness	Application of rubber gasket
				Thickness (1.5mm)
HYP-101	≤1200	150	10-12	4
			14-15	2

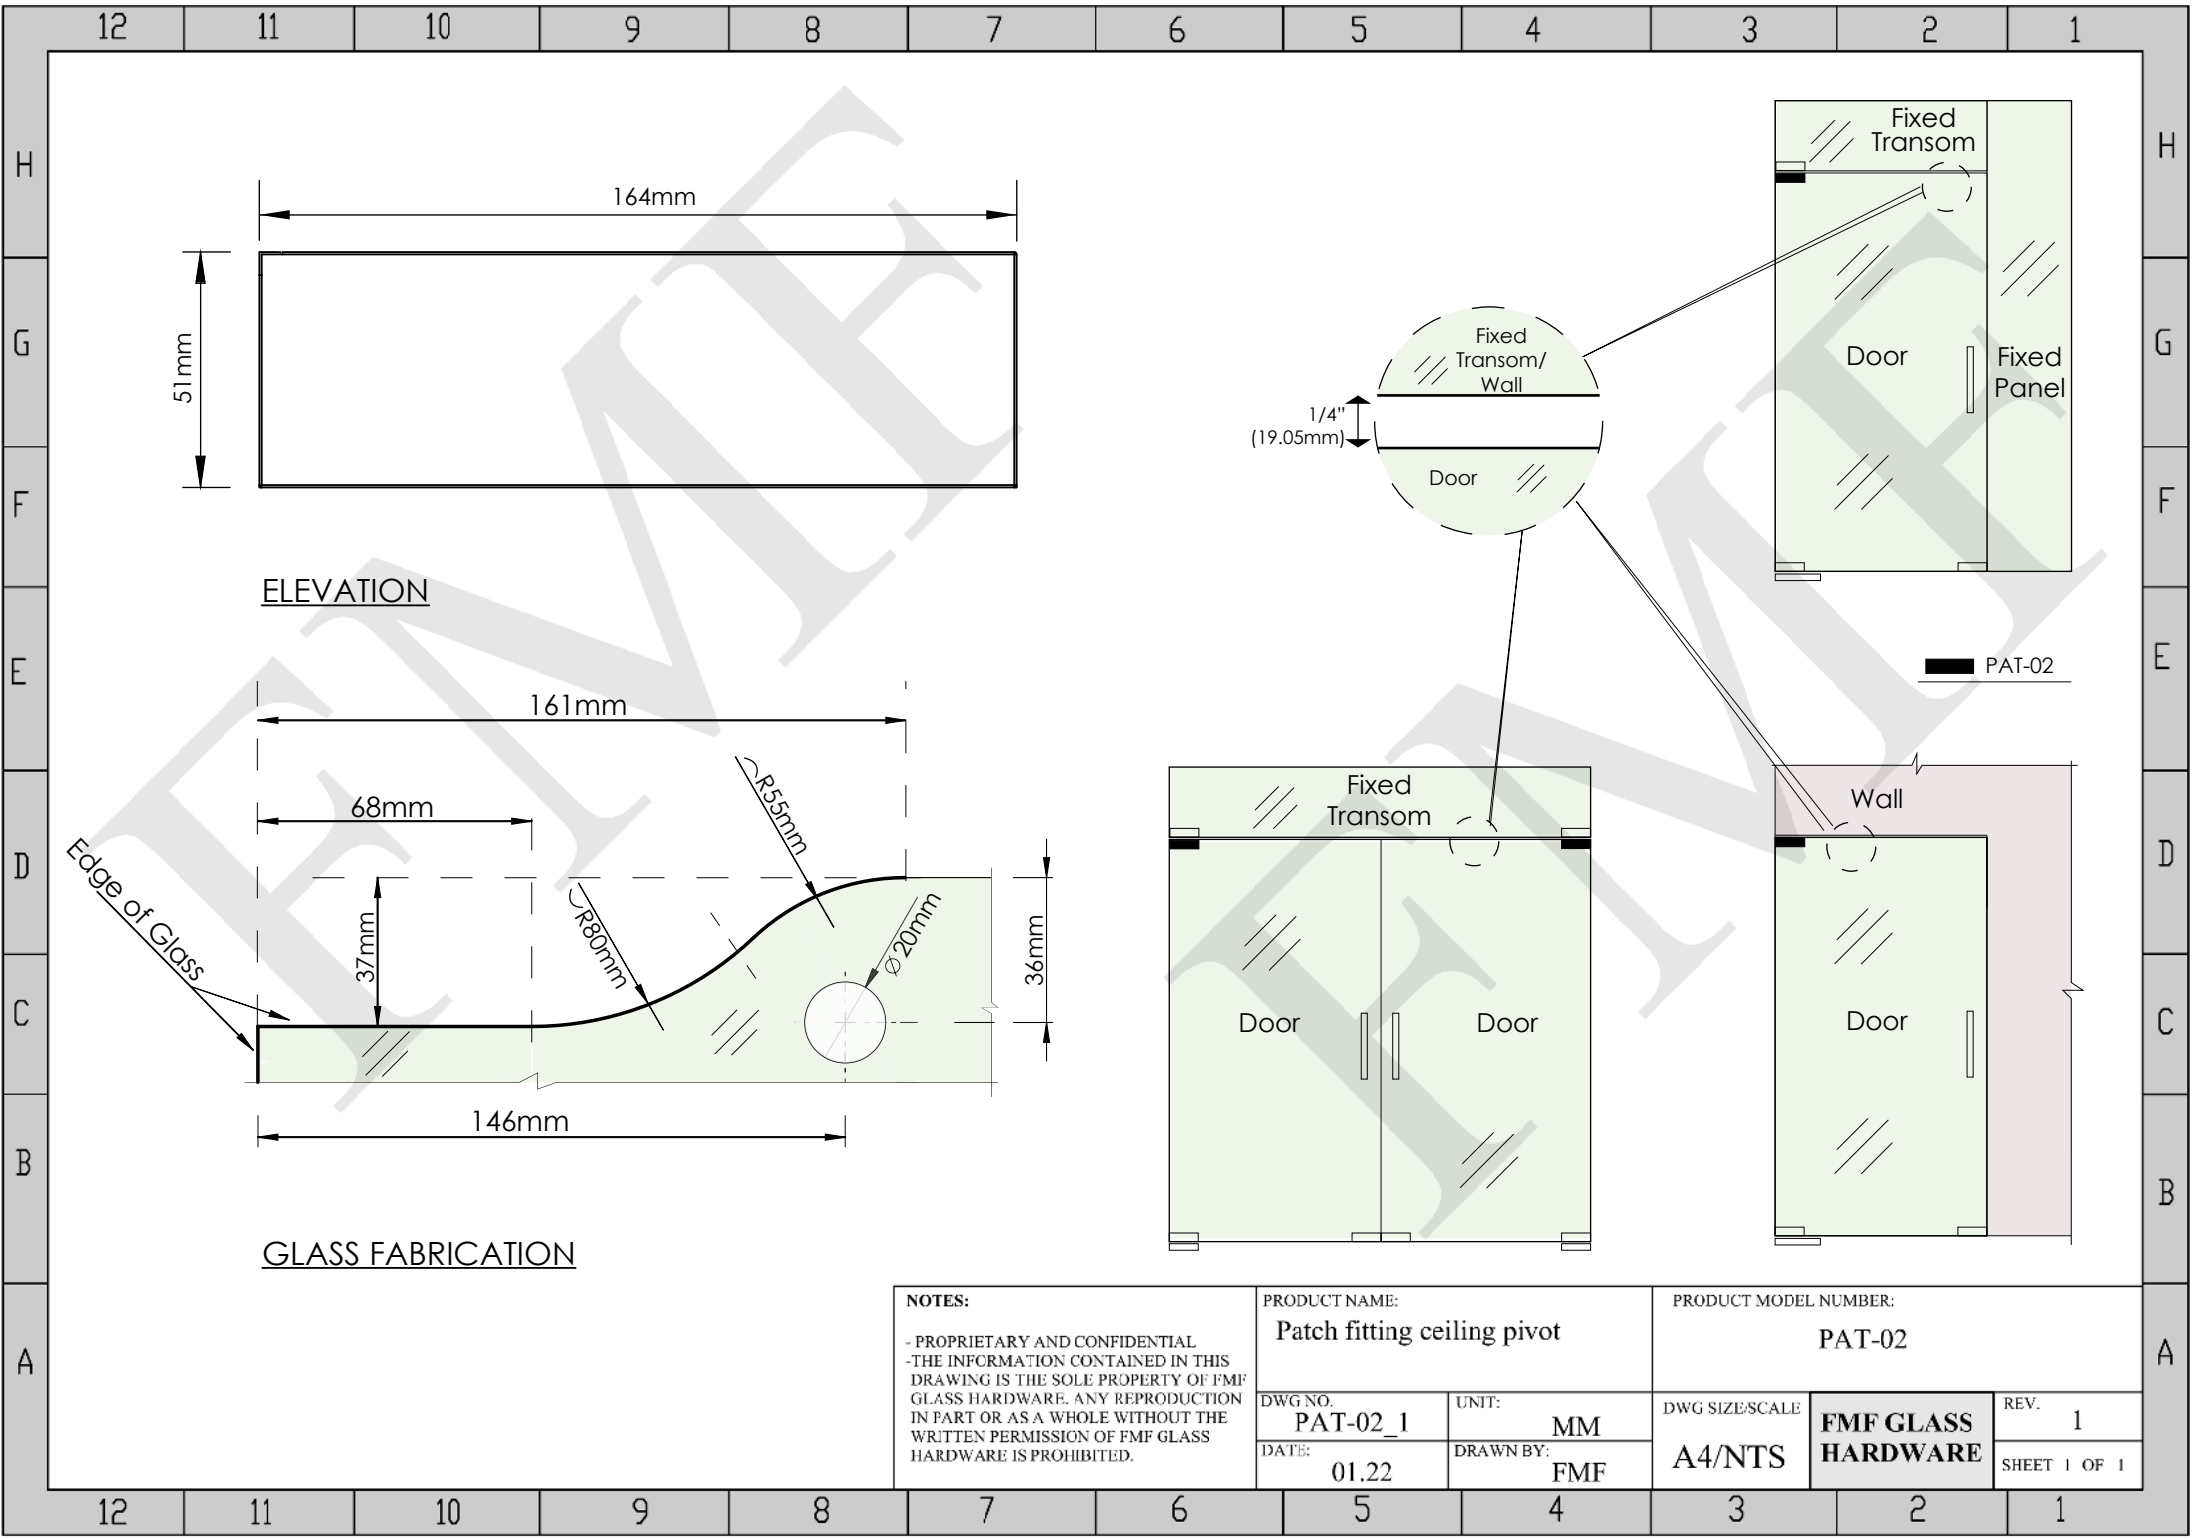

NOTES:

- PROPRIETARY AND CONFIDENTIAL
- THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF FMF
GLASS HARDWARE. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF FMF GLASS
HARDWARE IS PROHIBITED.

PRODUCT NAME:

Patch fitting ceiling pivot

PRODUCT MODEL NUMBER:

PAT-02

DWG NO.

PAT-02_1

UNIT:

MM

DWG SIZE/SCALE

A4/NTS

DRAWN BY:

FMF

**FMF GLASS
HARDWARE**

REV.

1

SHEET 1 OF 1