


**On Wood Surface:**

- Lag bolt 3/8"x 3 1/2"
- Optional: 3/8" thru-bolt or threaded rod with flat washers and nuts

**Fasteners Recommended on Concrete Surface:**

- Wedge anchor 3/8"x 3 1/2"

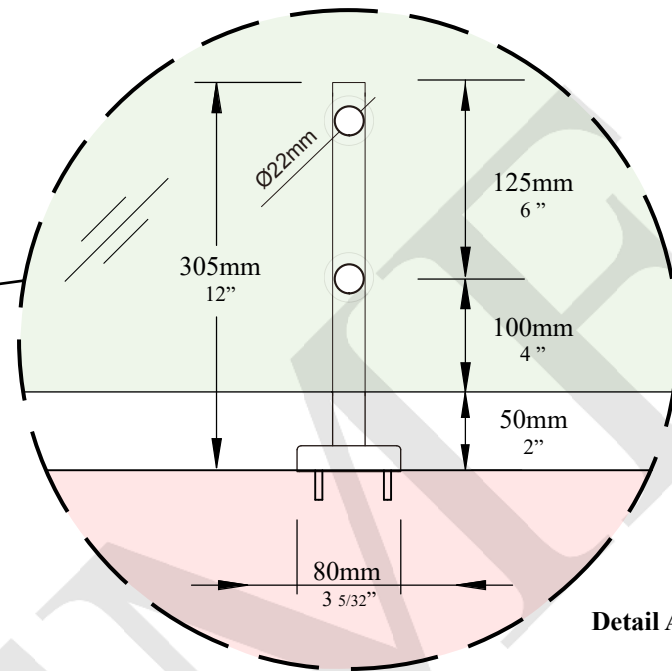

W (Inches)	X (Inches)	Y (Inches)	No. of Spigots
48	32	8	2
42	26	8	2
36	24	6	2

**General Notes:**

- The installed glass thickness must be 1/2" or 12mm and must be safety tempered.
- Recommendation is for hardware components only. Mounting the post to the base structure is a site condition and the installers must ensure that the fasteners are strong enough to resist the design weight.
- The base material to which the posts are being mounted must resist the design weight.

Glass Panel Height (Max.): 1000mm  
 W (Glass Width): 26" Minimum  
 X= 36" Maximum  
 Y= 6" Minimum - 9" Maximum

**GLASS FABRICATION**

<b>NOTES:</b> - PROPRIETARY AND CONFIDENTIAL -THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FMF GLASS HARDWARE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FMF GLASS HARDWARE IS PROHIBITED.	PRODUCT NAME: <b>Solid Mini Post with 38mm Standoff Attached</b>		PRODUCT MODEL NUMBER: <b>SPI-6MI</b>	
	DWG NO. <b>SPI-6MI_2</b>	UNIT: <b>MM</b>	DWG SIZE/SCALE <b>A4/NTS</b>	REV. <b>1</b>
	DATE: <b>12.23</b>	DRAWN BY: <b>FMF</b>	<b>FMF GLASS HARDWARE</b>	SHEET 1 OF 1