


Glass Panel:
Max: 1000mm
39 3/8"

On Wood Surface:

- Lag bolt 3/8"x 3 1/2"
- Optional: 3/8" thru-bolt or threaded rod with flat washers and nuts

Fasteners Recommended on Concrete Surface:

- Wedge anchor 3/8"x 3 1/2"

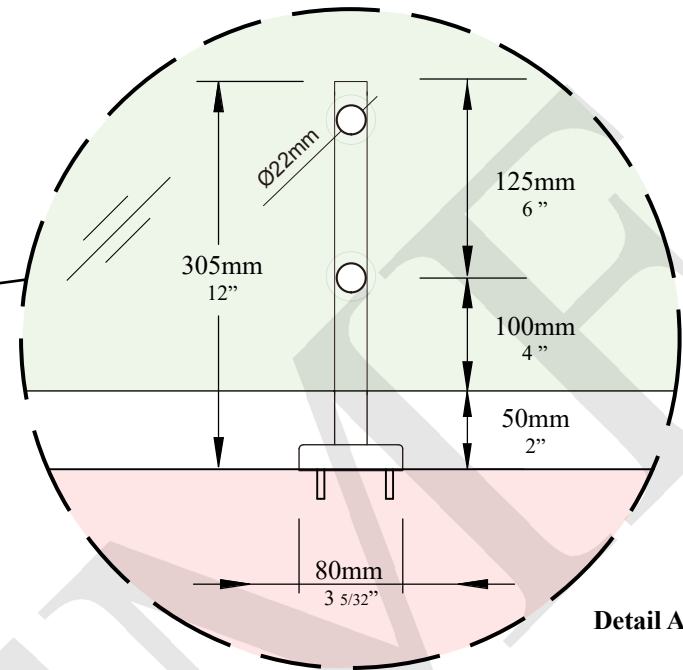

W (Inches)	X (Inches)	Y (Inches)	No. of Spigots
48	32	8	2
42	26	8	2
36	24	6	2

Glass Panel Height (Max.): 1000mm
W (Glass Width): 26" Minimum
X= 36" Maximum
Y= 6" Minimum - 9" Maximum

General Notes:

- The installed glass thickness must be 1/2" or 12mm and must be safety tempered.
- Recommendation is for hardware components only. Mounting the post to the base structure is a site condition and the installers must ensure that the fasteners are strong enough to resist the design weight.
- The base material to which the posts are being mounted must resist the design weight.

GLASS FABRICATION

NOTES:

- PROPRIETARY AND CONFIDENTIAL
-THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FMF GLASS HARDWARE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FMF GLASS HARDWARE IS PROHIBITED.

PRODUCT NAME:

Solid Mini Post with
38mm Standoff Attached

PRODUCT MODEL NUMBER:

SPI-6MI

DWG NO.

SPI-6MI_2

UNIT:

MM

DATE:

12.23

DRAWN BY:

FMF

DWG SIZE/SCALE

A4/NTS

**FMF GLASS
HARDWARE**

REV.

1

SHEET 1 OF 1