


Glass Panel:
1000mm
39 3/8"


On Wood Surface:
- Lag bolt 3/8"x 3 1/2"
- Optional: 3/8" thru-bolt or threaded rod with flat washers and nuts

Fasteners Recommended on Concrete Surface:
- Wedge anchor 3/8"x 3 1/2"

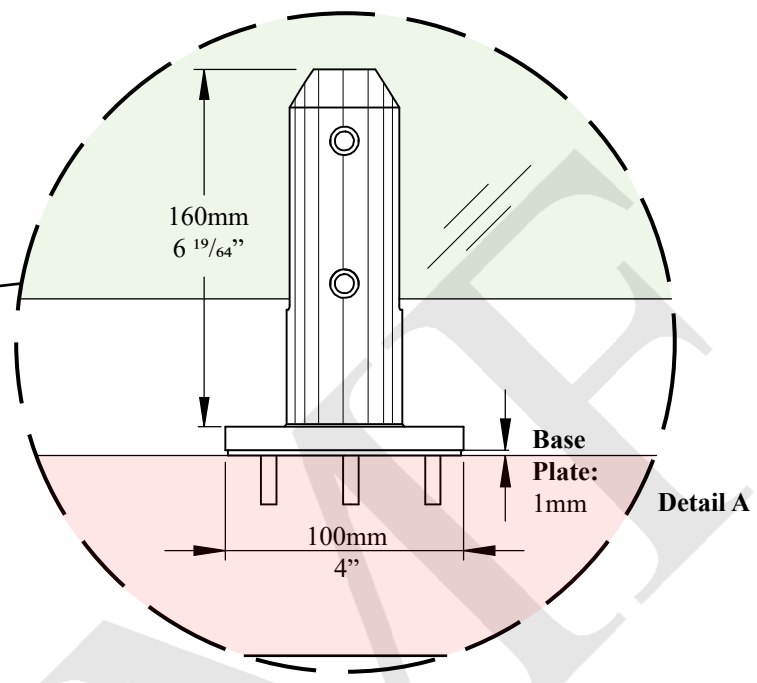

W (Inches)	X (Inches)	Y (Inches)	No. of Spigots
72	27	9	9
60	22	8	8
48	32	8	8
36	22	7	7
26	14	6	6

Glass Panel Height: 39 3/8" Maximum
W (Glass Width): 26" Minimum
X= 36" Maximum
Y= 6" Minimum - 9" Maximum

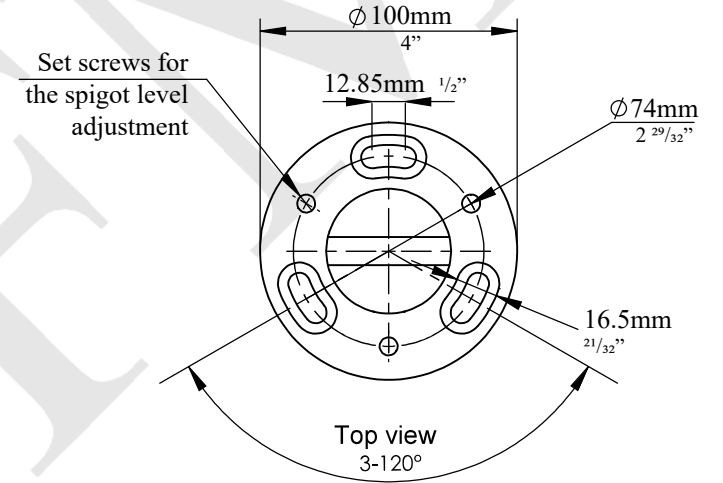

General Notes:

- The installed glass thickness must be 1/2" or 12mm and must be safety tempered.
- Recommendation is for hardware components only. Mounting the post to the base structure is a site condition and the installers must ensure that the fasteners are strong enough to resist the design weight.
- The base material to which the posts are being mounted must resist the design weight.

<p>NOTES:</p> <p>- PROPRIETARY AND CONFIDENTIAL - THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FMF GLASS HARDWARE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FMF GLASS HARDWARE IS PROHIBITED.</p>	<p>PRODUCT NAME: Round Spigot</p>		<p>PRODUCT MODEL NUMBER: SPI-6SR</p>		
	<p>DWG NO. SPI-6SR_1</p>	<p>UNIT: MM</p>	<p>DWG SIZE/SCALE A4/NTS</p>	<p>FMF GLASS HARDWARE</p>	<p>REV. 1</p>
	<p>DATE: 01.22</p>	<p>DRAWN BY: FMF</p>	<p>SHEET 1 OF 1</p>		